


Model No.				Applicable door size		Applicable door thickness(mm)		Type	"P" dimension (offset dimension)	Hold-open device stopper device installation position					
Without hold-open		With hold-open		Width(mm)	Weight(kg)	Steel door	Wooden door	Maximum opening angle	18	①	②	③	④	⑤	⑥
Right hand	Left hand	Right hand	Left hand							75"	80"	86"	91"	98"	105"
GC-4V-R	GC-4V-L	GCS-4V-R	GCS-4V-L	800	15	40	45			75"	81"	86"	92"	98"	105"
				to 1050	to 100	or more	or more			20	75"	81"	86"	91"	98"

● Make sure to install a door stopper in case of using this model.

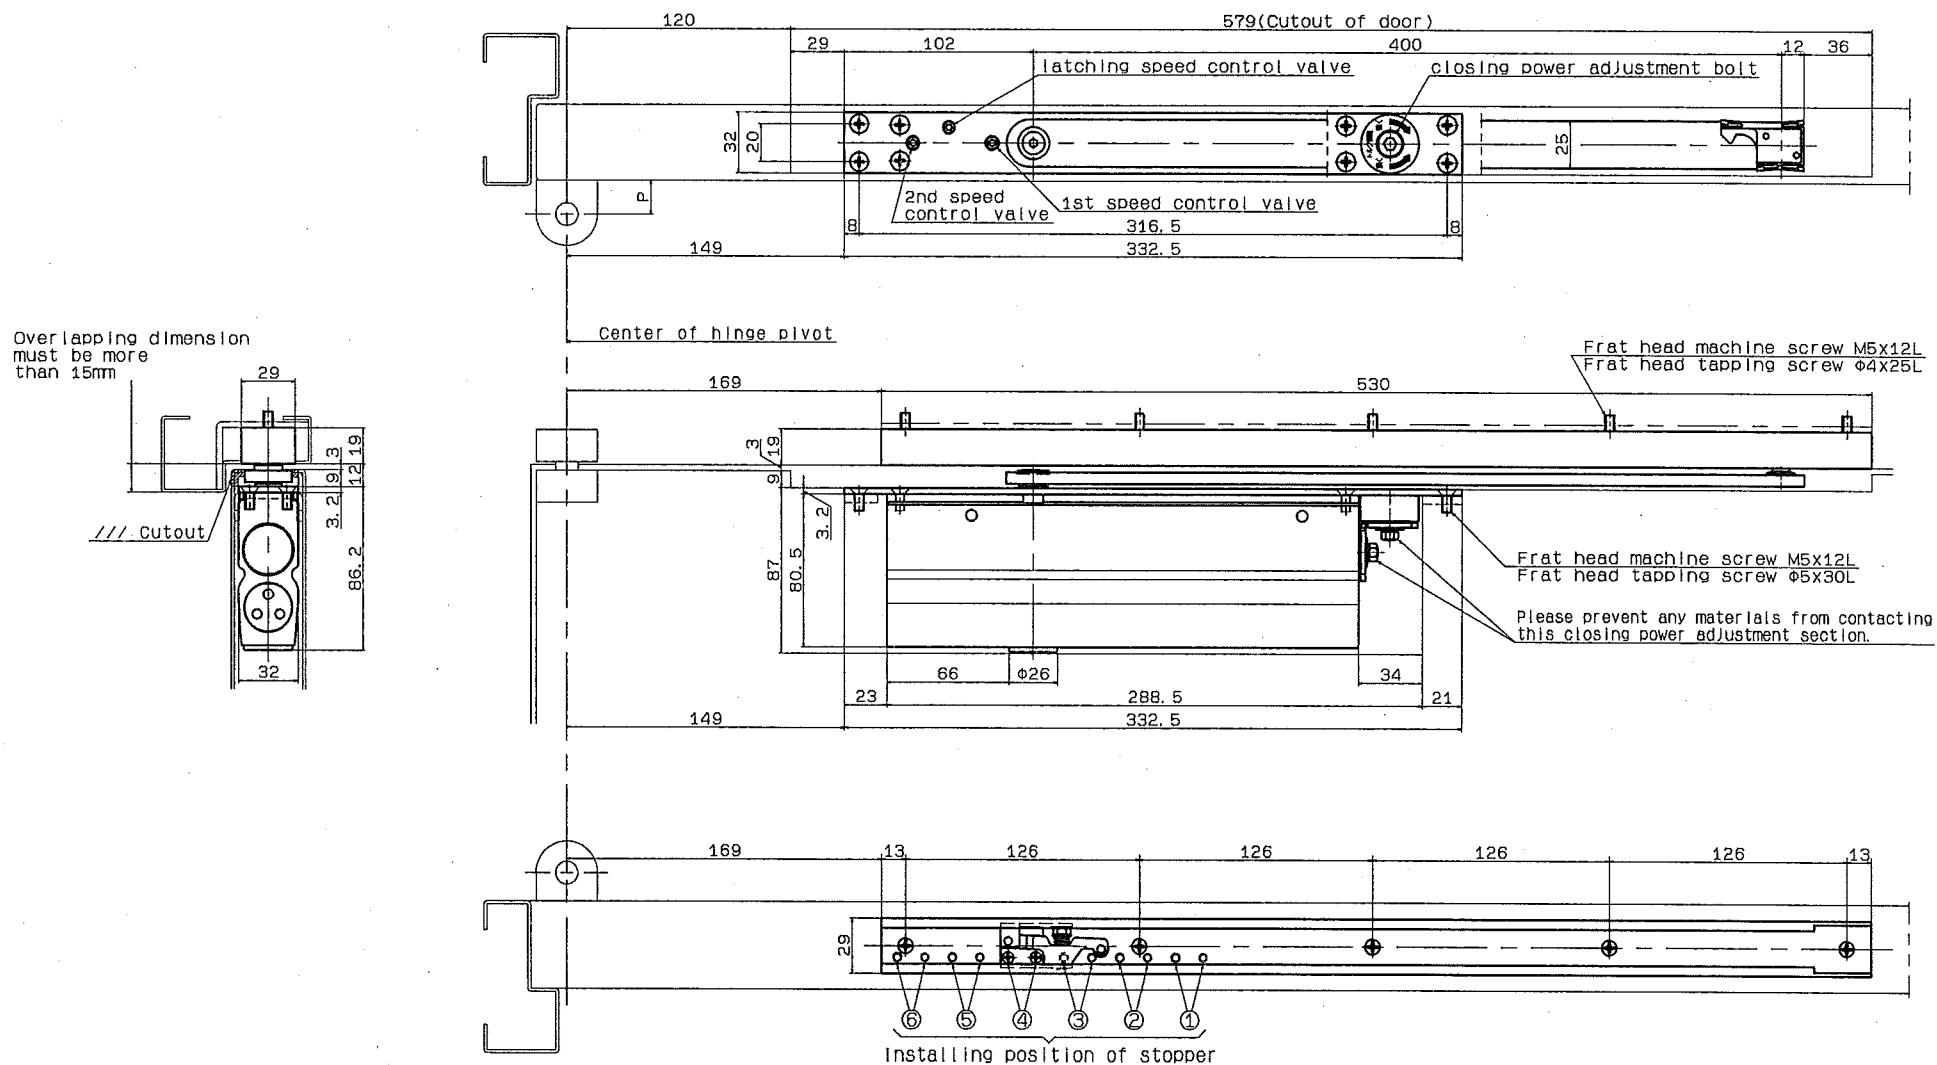

RYOBI LIMITED

PRODUCTS

CONCEALED TYPE

APPLICATION

Offset hung(105" opening) · Standard installation

MODEL No.

GC-4V, GCS-4V


DATE

07/30/2018

REV.

Model No.				Applicable door size		Applicable door thickness(mm)		Type	*P dimension (offset dimension)	Hold-open device stopper device installation position					
Without hold-open	With hold-open	Without hold-open	With hold-open	Width(mm)	Weight(kg)	Steel door	Wooden door			①	②	③	④	⑤	⑥
Right hand	Left hand	Right hand	Left hand	800	15	40	45	Maximum	18	68"	74"	81"	88"	96"	105"
GC-4V-R	GC-4V-L	GCS-4V-R	GCS-4V-L	to 1050	to 100	or more	or more	opening	25	68"	74"	80"	87"	95"	104"
								angle	20	68"	74"	81"	88"	96"	105"

● Make sure to install a door stopper in case of using this model.

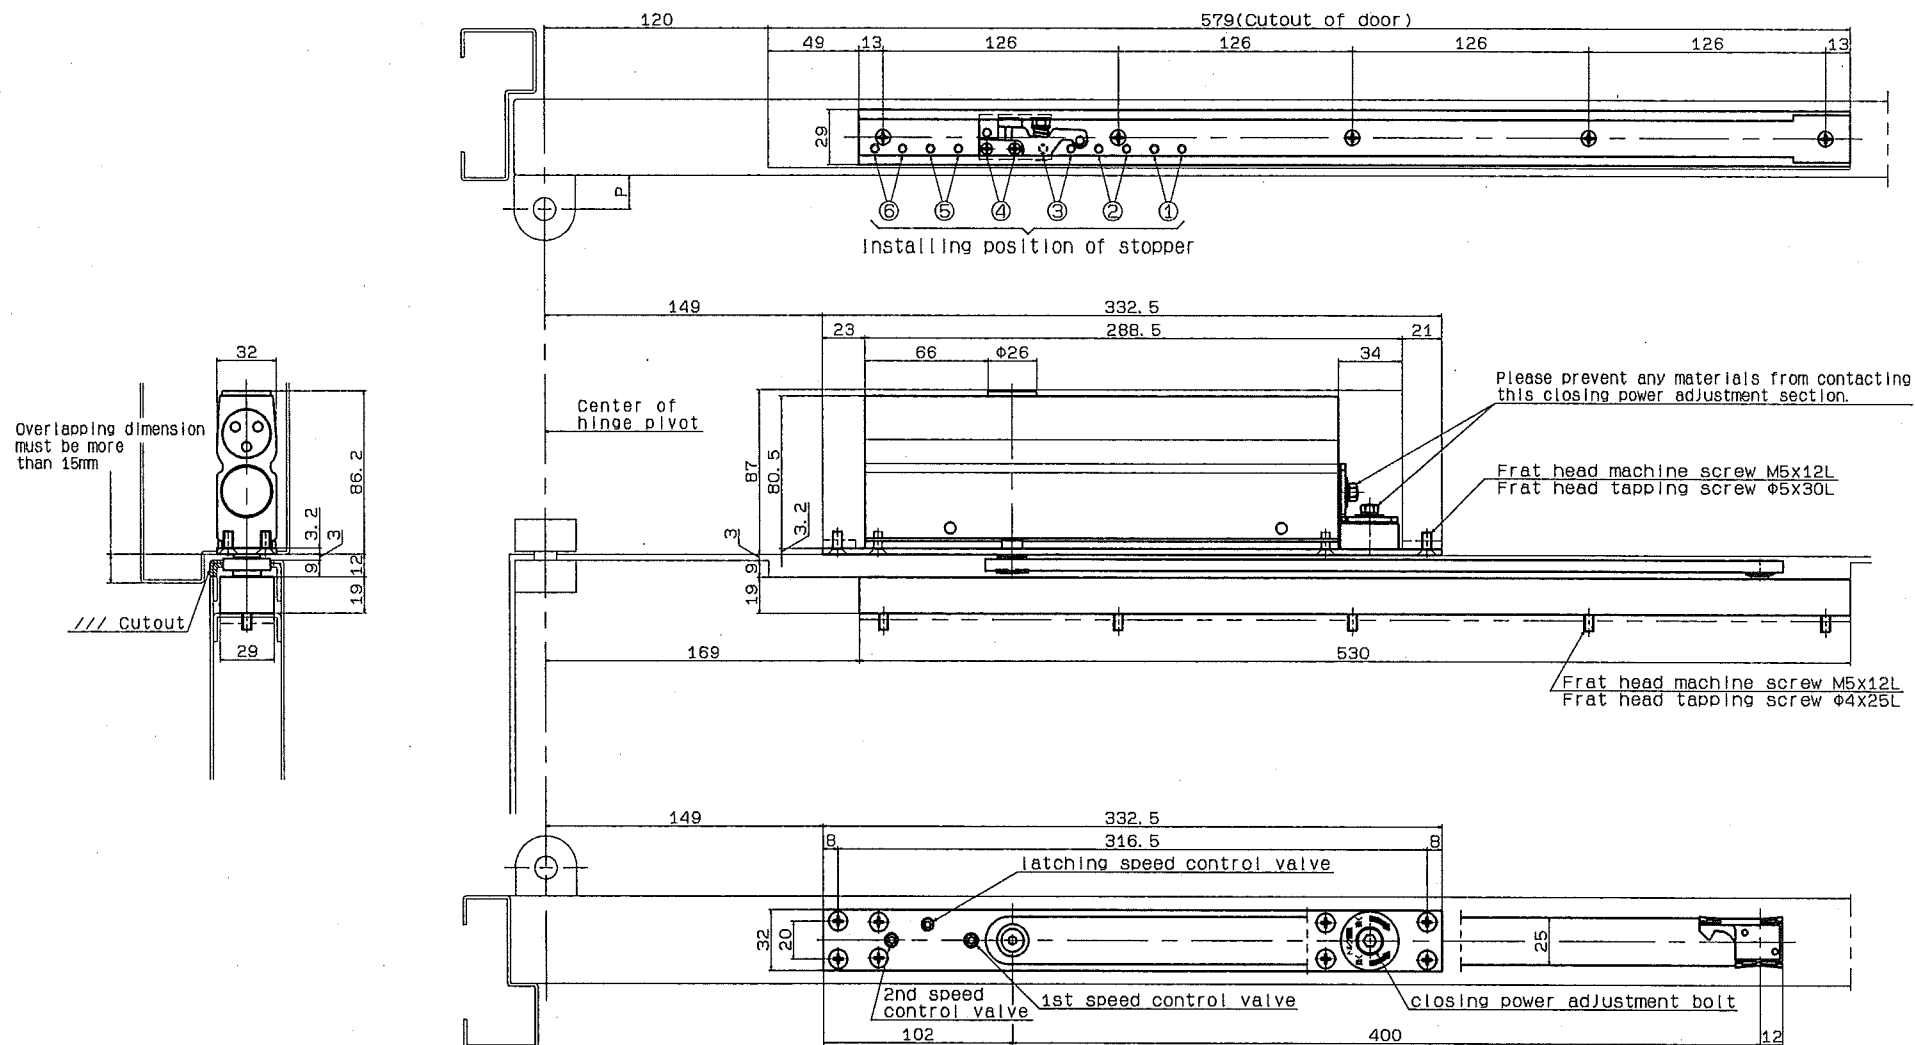

RYOBI LIMITED

PRODUCTS

CONCEALED TYPE

APPLICATION

Offset hung(105" opening) · Top Jamb Installation

MODEL No.

GC-4V, GCS-4V

DATE

07/30/2018

REV.